


Black Cement provides excellent adhesion when used with UK Gum Rope Rubber, and UK Compound Rope Rubber in hot applications such as section repairing. Recommended dry time 10-15 minutes.

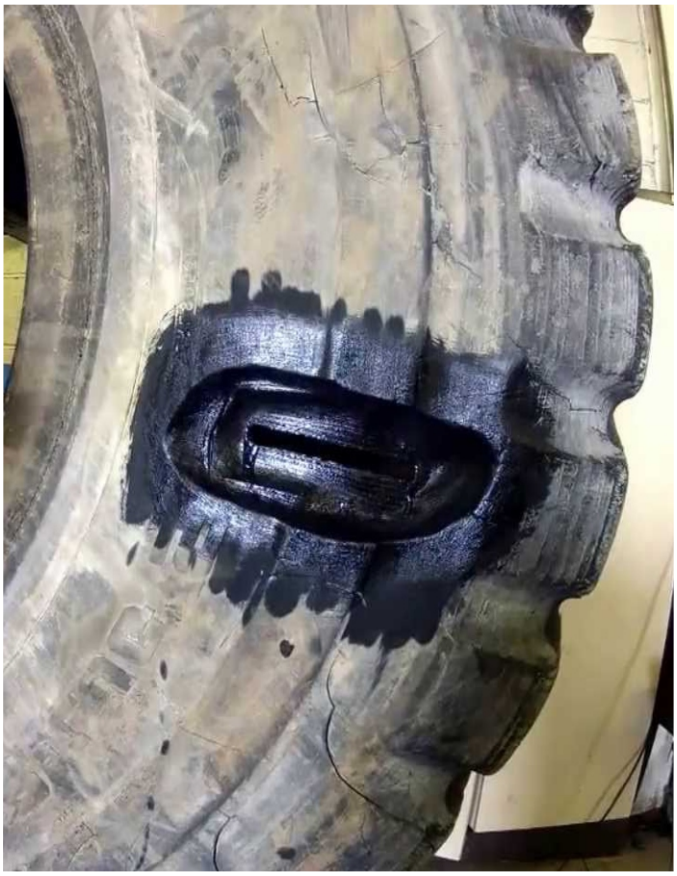

Accelerator solution for coating the buffed tyre inside and the buffed skive surface.

Thermopress ADHESIVE UK-HS is adapted to ROPE RUBBER with regard to its accelerator and adhesion system and can therefore be used at curing temperatures of at least 100° C (212° F)

Part Number	Description	Size
118 HS2221	UK HS (Heating Solution - Black)	800g / 890ml